

RENZ RING WIRE® COMB BINDING



RENZ RING WIRE® | 4 mm | 1.847 mm

Pitch 3:1
1 inch = 25,4 mm

FOR PROFESSIONAL PRESENTATIONS

Up to 12 mm [1/2"] binding thickness.

Contemporary and environmentally friendly.

For professional presentations. Secure.

Opens flat and stays flat.

Wire combs available

in nine colors.



RW
combined manually operated punch and closing machine

- punches up to 25 sheets* [2.5 mm/0.1"]
- for sizes up to 300 mm [12"]
- fixed margin depth
- integrated binding table

SRW
combined manually operated punch and closing machine

- punches up to 25 sheets* [2.5 mm/0.1"]
- binds up to 120 sheets* [12 mm/1/2"]
- variable sizes up to 340 mm [13"/foolscap]
- selectable punch pins
- integrated binding table

ACCESSORIES



Order from a single source

Full range of accessories for a perfect presentation of proposals, catalogs, manuals, etc. Back covers and transparent covers in many colors and thicknesses. Filing strips and self-adhesive pouches for business cards to help organize your office.


SRW Comfort
combined electrical punch and manual closing machine

- punches up to 20 sheets* [2 mm/0.08"]
- binds up to 120 sheets* [12 mm/1/2"]
- variable sizes up to 340 mm [13"/foolscap]
- variable margin depth
- selectable punch pins
- integrated binding table

ERW
combined electrical punch and manual closing machine

- punches up to 25 sheets* [2.5 mm/0.1"]
- binds up to 120 sheets* [12 mm/1/2"]
- variable sizes up to 340 mm [13"/foolscap]
- variable margin depth
- selectable punch pins
- integrated binding table

PLASTIC BINDING



FLEXIBLE AND VERSATILE


Up to 50 mm binding thickness [2"].

Flexible and versatile.

Opens flat and stays flat.

Pages can be changed later.

Plastic combs available in six colors.

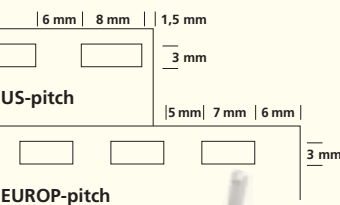

private bind

- combined manually operated punch and binding machine
- punches up to 10 sheets* [1 mm/0.04"]
- binds up to 150 sheets* [15 mm/9.16"]
- for sizes up to A4 [300 mm/12"]
- fixed margin depth

combinette / combi V

- combined manually operated punch and binding machine
- punches up to 25 sheets* [2.5 mm/0.1"]
- binds up to 500 sheets [50 mm/2"]
- for sizes up to 300 mm [12"]
- fixed margin depth [combinette]
- variable margin depth [combi V]

combi S

- combined manually operated punch and binding machine
- punches up to 25 sheets* [2.5 mm/0.1"]
- binds up to 500 sheets* [50 mm/2"]
- variable sizes up to 340 mm [13"/foolscap]
- variable margin depth
- selectable punch pins

Plastic combs can be printed.



combi Comfort

combi Comfort
combined electrical punch and manual binding machine


- punches up to 20 sheets* [2 mm/0.08"]
- binds up to 500 sheets* [50 mm/2"]
- variable sizes up to 340 mm [13"/foolscap]
- variable margin depth
- selectable punch pins

combi E

combi E
combined electrical punch and manual binding machine

- punches up to 25 sheets* [2.5 mm/0.1"]
- binds up to 500 sheets* [50 mm/2"]
- variable sizes up to 340 mm [13"/foolscap]
- variable margin depth
- selectable punch pins

SPIRAL BINDING



THE TRADITIONAL LOOSE LEAF BINDING

Up to 15 mm [5/8"]

binding thickness.

Opens flat and stays flat.

Plastic spirals are available

in many colors.



SP 360

SP 360
manual desktop punch for spiral binding

SP 360 comfort
electrical desktop punch for spiral binding


SPB 360
manual punch for spiral binding incl. electrical spiral inserting device with cutting and bending knife

SPB 360 comfort
electrical punch for spiral binding incl. electrical spiral inserting device with cutting and bending knife

- punching width 36 cm [14"]
- punches up to 20 sheets* [2 mm/0.08"]
- pitch 6 mm
- 6 mm pitch
- round holes ø 4 mm
- also available with round holes ø 3,6 mm and 5 mm pitch

[see also MBS Modular Binding Systems]

PERFORATING, PUNCHING AND BINDING



THE PROFESSIONAL AND FLEXIBLE PUNCH


AND PERFORATING MACHINE

Fast and easy change of

punching dies. For all common

types of punching

and perforating.

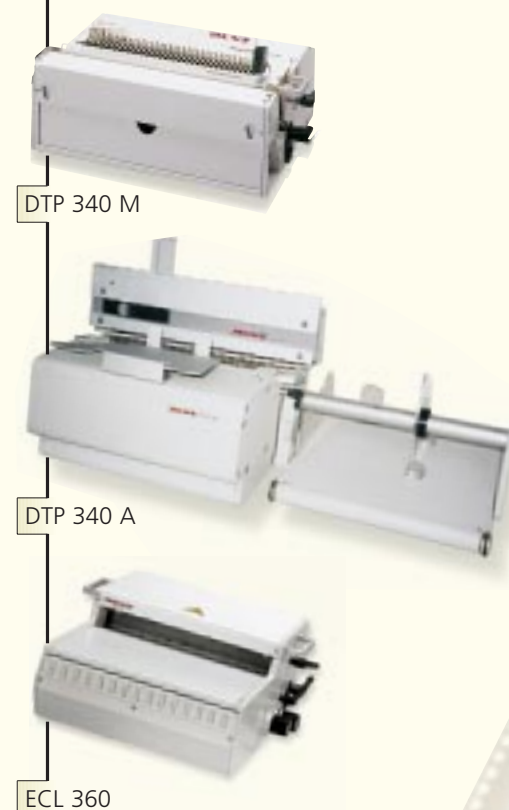

DTP 340 M

DTP 340 A

ECL 360

DTP 340 M
heavy duty electrical desktop punch

- punching width 340 mm [13"/foolscap]
- interchangeable punch dies
- punches up to 35 sheets* [3.5 mm/.140"]

DTP 340 A
semi-automatic heavy duty electrical desktop punch

- interchangeable punch dies
- quick die change in 1-2 minutes
- punching width 340 mm [13"/foolscap]
- punches up to 35 sheets [3.5 mm/.140"]

ECL 360
electrical closing machine

- binding width 360 mm [14.2"]
- for all types of books and calendars in small to medium quantities
- for all diameters up to 1 1/4" [independent of pitch]

* 70/80 gr/m² paper

**MBS
MODULAR BINDING SYSTEMS**



Modular expandable punch and binding system for Renz Ring Wire comb binding, coil binding and plastic comb binding. All modules can be added to the DTP 340 M to form a productive punch and binding system.

DTP-WBS

WBS 340
manual closing machine for wire comb binding
- max. working width 340 mm [13,4"] from \varnothing 3/16" - 1 1/4" [5,5-X32 mm] independent of pitch packed


CBS 340
electrical coil inserting machine for electrical insertion of plastic and wire coils
- up to \varnothing 20 mm
- 230 V, 50 cycles or 115 V, 60 cycles packed

CCS 340
manual cutting and crimping machine for plastic coils up to 20 mm \varnothing or metal coils up to 16 mm [thickness of wire max. 1 mm]
- max. working width 340 mm packed

PBS 340
manual binding machine for plastic bindings from 5 to 52 mm \varnothing working width 340 mm for US-pitch max. 24 rings - packed or for Euro pitch max. 28 rings - packed

Module holding device
necessary if the a.m. modules are used as stand-alone machine.

LAMINATING SYSTEMS



POUCH LAMINATION SYSTEMS AND ROLL LAMINATION SYSTEMS



HT 230 Photo L
pouch laminator
- maximum width 235 mm [9"]
- film thickness up to 125 mic.
- automatic temperature control
- suitable for photo laminating
- plastic housing
- reverse facility

HT 230 Photo
pouch laminator
- maximum width 230 mm [9"]
- for all film thicknesses
- adjustable lamination temperature
- automatic temperature control
- plastic housing
- reverse facility

HT 320 Photo
pouch laminator
- maximum width 340 mm [13,3"]
- film thickness up to 175 mic.
- adjustable lamination temperature
- automatic temperature control
- plastic housing
- reverse facility

HT 320 L
pouch laminator
- maximum width 320 mm [12-1/2"]
- for all film thicknesses
- adjustable lamination temperature
- automatic temperature control
- suitable for photo laminating
- plastic housing

HT 320 P
pouch laminator
- maximum width 330 mm [12-1/2"]
- for all film thicknesses
- adjustable lamination temperature
- heated lamination drums and heat plates
- variable speed
- automatic temperature control
- plastic housing
- reverse facility

HR 340 V
heat seal roll laminator
- maximum width 340 mm [13-3/8"]
- maximum speed up to 1.5 m/min [5'/min]
- film thickness up to 0.125 mm [.005"]
- heated lamination drums for best lamination quality

HR 460 V
heat seal roll laminator
- maximum width 460 mm [18"]
- maximum speed up to 1.5 m/min [5'/min]
- film thickness up to 0.125 mm [.005"]
- heated lamination drums for best lamination quality

Your RENZ dealer
Alterations in the construction are reserved.
Order number 494721040

Durable protection of your documents.

Security from tampering.


For brilliant presentations.

new Gives your documents an attractive and professional look.

RENZ®

BINDING AND LAMINATING SYSTEMS

ONE PITCH®



WIRE COMB BINDING FOR PROFESSIONAL PRESENTATIONS

Up to 28 mm [1-1/8"] book thickness.

Contemporary and environmentally friendly.

For professionally presentations.

Secure.

Opens flat and stays flat.

Wire combs

available in nine colors.



eco C
combined manually operated punch and closing machine
- punches up to 30 sheets* [3 mm/0.12"]
- binds up to 280 sheets* [28 mm/1 1/8"]
- for sizes up to 300 mm [12"]
- fixed margin depth
- integrated binding table

eco Comfort
combined electrical punch and manual closing machine
- punches up to 20 sheets* [2 mm/0.08"]
- binds up to 280 sheets* [28 mm/1 1/8"]
- variable sizes up to 340 mm [13"/foolscap]
- variable margin depth
- selectable punch pins
- integrated binding table

eco S
combined manually operated punch and closing machine
- punches up to 30 sheets* [3 mm/0.12"]
- binds up to 280 sheets* [28 mm/1 1/8"]
- variable sizes up to 340 mm [13"/foolscap]
- variable margin depth
- selectable punch pins
- integrated binding table

eco E
combined electrical punch and manual closing machine
- punches up to 30 sheets* [3 mm/0.12"]
- binds up to 280 sheets* [28 mm/1 1/8"]
- variable sizes up to 340 mm [13"/foolscap]
- variable margin depth
- selectable punch pins
- integrated binding table

* 70/80 gr/m² paper